

Annex 2 - Installation Manual

Product Name: Mimic car, max 6 kids, age group 2-6 years old

Number: 151556

Manufacturer: Ltd. "GaloGroup", Daugavpils, LV5401, Latvia

Standards: EN 1176-1:2017+A1



Package Contents:

1x Car body (assembled)

4x Anchoring brackets


1x Instruction manual

Material			
Screws	Wood	Paint	
Torx 3.5*40 mm 	120*18 mm 		
Torx 3.5*50 mm 	45*45 mm 		
Anchor screw 120*8 mm WARNING! Anchors mounted to a concrete slab with dowels or chemical anchors! 	Plywood 12 mm 		
	Laminated plywood 12 mm 		
Drew		Eric Garmolis	26.05.25
GaloGroup LLC		Mimic Bil (car)	Number 151557
		Wood	Page 7



Safety Notices:


- Product must be installed on certified shock-absorbing surface (EN 1177 compliant).
- Keep 1500 mm safety zone around entire structure
- Under adult supervision
- Check installation integrity regularly (please see Annex 4 Check list)

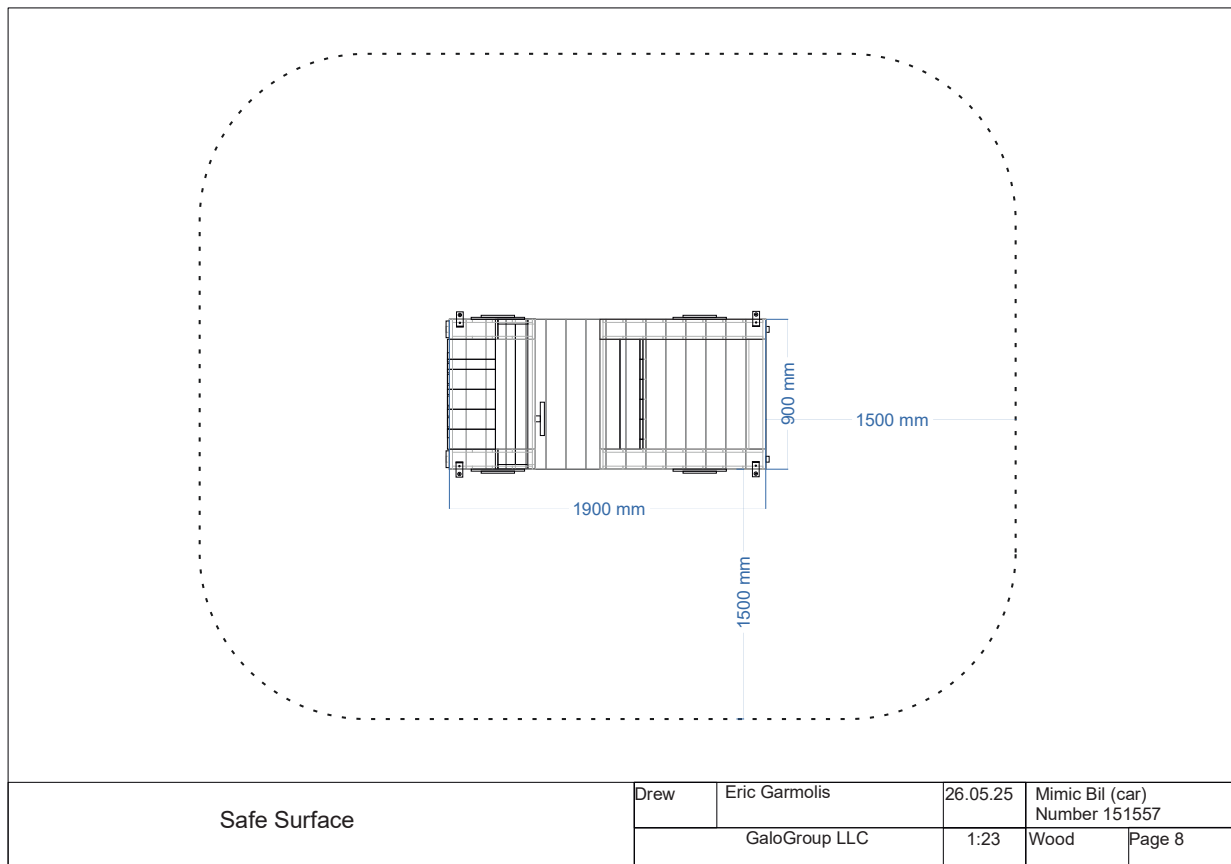

Installation Options:


Ground Anchoring:

- Dig 4 holes approx. 300 mm deep
- Insert anchoring brackets and fix with concrete or compacted gravel
- Align and level the structure
- Attach car frame to brackets with included screws

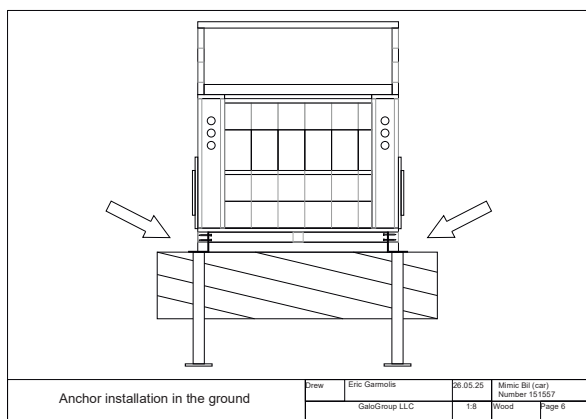

Surface Anchoring:

- Prepare level concrete or asphalt surface
- Mark and drill 4 holes Ø10 mm (depth ~70 mm)
- Insert anchors and fix brackets using expansion bolts
- Attach frame to brackets securely

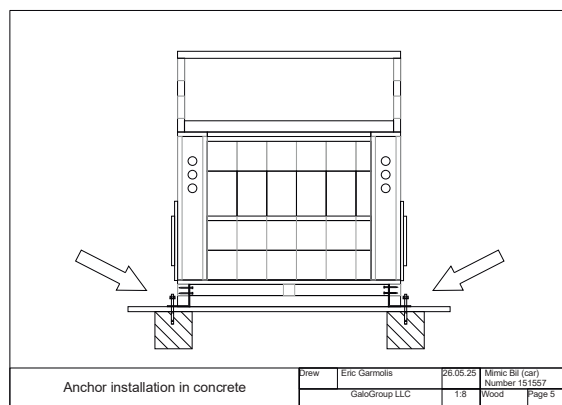

Maintenance & Inspection Guide

Routine Maintenance:

Clean surfaces from dirt and moisture buildup monthly
Repaint or seal wooden parts annually (or as needed) with outdoor-grade, non-toxic paint
Remove any sharp objects, splinters or rust if detected

Visual Inspection (Daily):

Check for obvious damage or loose parts
Ensure structure is upright and stable
Confirm no debris or hazards in the safety zone

Technical Inspection (Annual):

Test all anchor points and tightening of bolts
Inspect wood for rot, cracks or weather damage
Confirm integrity of surface materials (no erosion under the product)

Winter Maintenance:

Remove snow and ice regularly to prevent slip risk
Ensure drainage is working (especially under car body)
Avoid usage during heavy frost or flooding
It is permitted to cover the structure with a breathable, water-resistant outdoor cover (e.g. polyester fabric with ventilation) to protect from snow accumulation. Do not use airtight plastic sheets as they may trap moisture and increase the risk of wood decay

This product conforms to EN 1176-1:2017+A1

Version: 2025.01 / Language: EN