

MAXX 2601

4 - 14 years



32 kids

58,3 m²**Material specification**

- Hot-dip galvanized and powder coated construction of 200 x 120 mm profile,
- Platforms made of durable anti-slip and waterproof HPL plate,
- Transparent polycarbonate panels with a weather-resistant print,
- Covers made of hot-dip galvanized and powder coated steel mesh,
- Side panels made of Robinia - very durable acacia wood without sharp edges, resistant to weather conditions
- Stainless steel tube slide,
- Elements made of safe, certified rubber with textile reinforcement,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel screws and/or screws covered with plastic caps,

**Physical development**

sliding



observation



community



climbing






1
number of towers





1
number of slides



8
number of activity elements

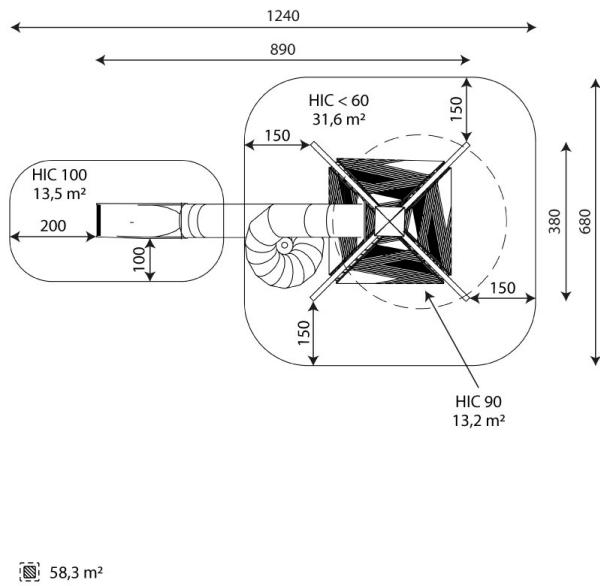

58,3 m²

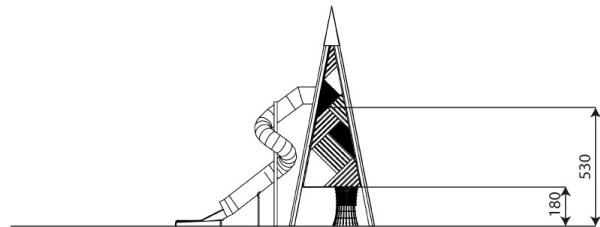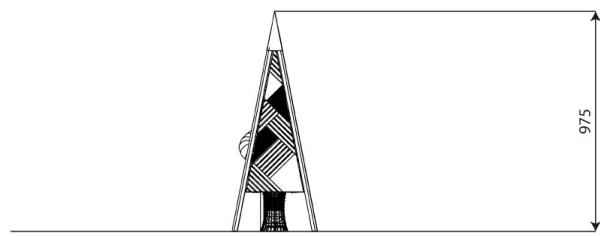

Guarantee



30 year guarantee -
Durability of steel and
stainless steel
structural elements



15 year guarantee - Durability
of steel and stainless steel
structures of mobile devices;
durability of Robinia wood
structural elements



10 year guarantee - Structural
strength of HDPE, 100% recycled
HDPE and HPL elements;
structural elements made of
100% recycled material
(composite)



5 year guarantee - Corrosion resistance
of stainless steel and hot-dip galvanized
and powder-coated steel elements,
resistance to bark beetles and rotting of
wooden structural elements

Detailed information in the guarantee card

Product technical sheet

MAXX 2601

Product data

Length	890 cm
Width	380 cm
Total height	975 cm
Age group	4 - 14 years
Number of users	32 kids
Safety zone	58,3 m ²
Free fall height	90 cm
The height of the platforms	180, 400, 530 cm
tube slide platform height	530 cm
In accordance with norm EN	1176-1:2017+A1:2023
Availability of spare parts	YES

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;



Surfaces according to EN 1176-1:2017+A1:2023

MAXX 2601

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		100

Amount of safe surface corresponding with free fall height:

HIC <60	31,6 m ²
HIC 90	13,2 m ²
HIC 100	13,5 m ²

Data is subject to change without prior notice.

