

MAXX 2610



4 - 14 years



40 kids



104,6 m²



Material specification

- Hot-dip galvanized and powder coated construction of 200 x 120 mm profile,
- Platforms made of durable anti-slip and waterproof HPL plate,
- Transparent polycarbonate panels with a weather-resistant print,
- Covers made of hot-dip galvanized and powder coated steel mesh,
- Side panels made of Robinia - very durable acacia wood without sharp edges, resistant to weather conditions
- Stainless steel tube slide,
- Elements made of safe, certified rubber with textile reinforcement,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel screws and/or screws covered with plastic caps,



Physical development



sliding



community



climbing



observation



passage





2

number of
towers



2

number of
slides



14

number of activity
elements

Product technical sheet

MAXX 2610




Product data

| | |
|-----------------------------|----------------------|
| Length | 1315 cm |
| Width | 1125 cm |
| Total height | 975 cm |
| Age group | 4 - 14 years |
| Number of users | 40 kids |
| Safety zone | 104,6 m ² |
| Free fall height | 90 cm |
| The height of the platforms | 90, 180, 400, 530 cm |
| tube slide platform height | 355, 530 cm |
| In accordance with norm EN | 1176-1:2017+A1:2023 |
| Availability of spare parts | YES |

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

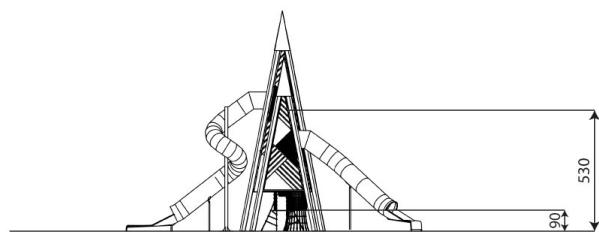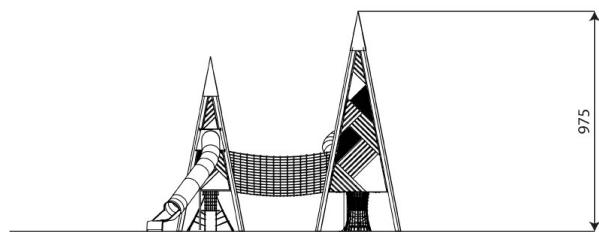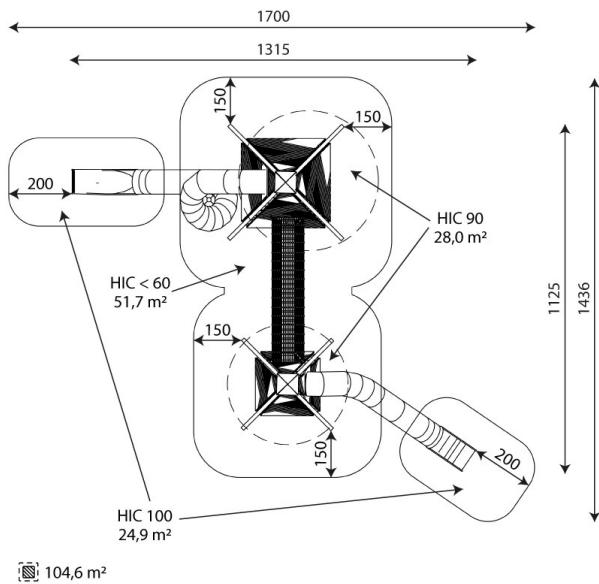

Guarantee



30 year guarantee -
Durability of steel and
stainless steel
structural elements



15 year guarantee - Durability
of steel and stainless steel
structures of mobile devices;
durability of Robinia wood
structural elements



10 year guarantee - Structural
strength of HDPE, 100% recycled
HDPE and HPL elements;
structural elements made of
100% recycled material
(composite)



5 year guarantee - Corrosion resistance
of stainless steel and hot-dip galvanized
and powder-coated steel elements,
resistance to bark beetles and rotting of
wooden structural elements

Detailed information in the guarantee card



Surfaces according to EN 1176-1:2017+A1:2023

| | Description (mm) | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | - | - | ≤ 100 |
| bark (A,C) | Particle size from 20 to 80 | 30 | ≤ 200 |
| | | 40 | ≤ 300 |
| woodchips (A,C) | Particle size from 5 to 30 | 30 | ≤ 200 |
| | | 40 | ≤ 300 |
| sand or gravel (A,C) | Particle size from 0,25 to 8 | 30 | ≤ 200 |
| | | 40 | ≤ 300 |
| synthetic attested (A,B,C) | Tested according to EN 1177 | | 100 |

Product technical sheet

MAXX 2610

Amount of safe surface corresponding with free fall height:

HIC <60 51,7 m²

HIC 90 28,0 m²

HIC 100 24,9 m²

Data is subject to change without prior notice.

