




**Product technical sheet****SWING ST0514****1 - 14 years****1 kids****11,9 m²****Material specification**

- Powder galvanized and powder coated or stainless steel construction of 80 x 80 mm profile,
- Steel rope in polypropylene braid,
- Attested, safe seats,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Stainless steel swing fittings,
- Stainless steel screws and/or screws covered with plastic caps,
- Safe end caps on top of the structure made of rubber or polypropylene,

**Physical development****rocking**

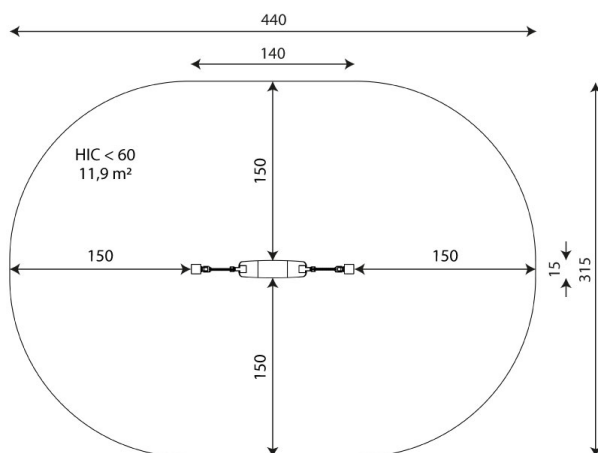

11,9 m²

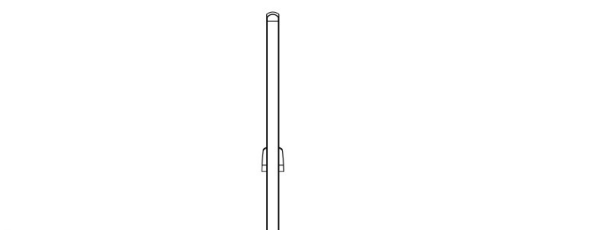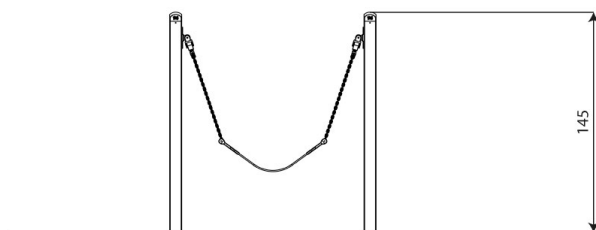

## Product technical sheet

# SWING ST0514

## Product data

|                             |                     |
|-----------------------------|---------------------|
| Length                      | 140 cm              |
| Width                       | 15 cm               |
| Total height                | 145 cm              |
| Age group                   | 1 - 14 years        |
| Number of users             | 1 kids              |
| Safety zone                 | 11,9 m²             |
| Free fall height            | <60 cm              |
| In accordance with norm EN  | 1176-1:2017+A1:2023 |
| Availability of spare parts | YES                 |

Data is subject to change without prior notice.

## Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- render is for reference only, the actual appearance of the equipment and its color may vary;

## Guarantee

**30**

30 year guarantee - Durability of steel and stainless steel structural elements

**15**

15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

**10**

10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

**5**

5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card



## Surfaces according to EN 1176-1:2017+A1:2023

|                                 | Description (mm)             | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | -                            | -                    | ≤100                      |
| bark (A,C)                      | Particle size from 20 to 80  | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| woodchips (A,C)                 | Particle size from 5 to 30   | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| sand or gravel (A,C)            | Particle size from 0,25 to 8 | 30                   | ≤200                      |
|                                 |                              | 40                   | ≤300                      |
| synthetic attested (A,B,C)      | Tested according to EN 1177  |                      | <60                       |

## Product technical sheet

# SWING ST0514

### Amount of safe surface corresponding with free fall height:

HIC <60 11,9 m<sup>2</sup>

Data is subject to change without prior notice.

